

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 19 TOWNSHIP 14 RANGE 4

DATE: ~~10-13-03~~ 4-17-08

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison ;re-set construction


METHOD OF ESTABLISHMENT: County: 3-17-01

IN. S.P.C. E ZONE NAD '83

NAME: 14041907

N: 487146.3843(m)

E: 59416.7951(m)

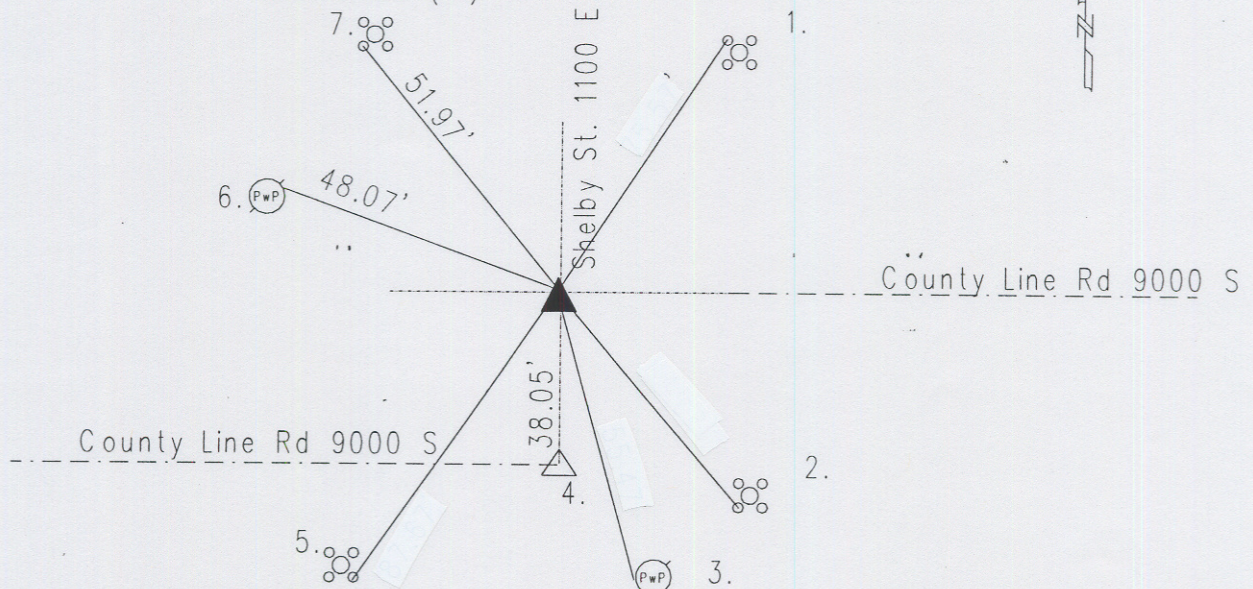

Original post set 1820 by Hendricks with witnesses: 12" beech S 37 W 6 links; 10" beech S 3 E 10 links per Marion County Atlas pg. 9. Hosbrook 11-1856 called original witness still standing; but, notes stone as monument per Perry Township Legal Survey Book pg. 32. Beber 12-21-04 also called stone in place of post per Sec. 24-14-3. SE corner per Perry Township Legal Survey Book pg. 46. 8-14-64 called iron pin. 5-31-75 Sec. 24-14-3 ... SE corner called steel plug. 7-1-75 called PK nail. NOTE: This is a double corner and lies 38.05 feet N. Excavated 6-25-86 and Harrison set. '87 construction required construction ties taken per MCSO> Re-tied and re-set Harrison 10-20-87. Re-tied 4-11-96 by Wilcoxon. Re-tied 3-17-01 by Wilcoxon. Re-tied 10-13-03 by Wilcoxon. 14041907

REF.	DISTANCE	DESCRIPTION
1.	75.65'	Cut 'x' NW-bolt of aluminum pole base
2.	62.90'	Cut 'x' SW-bolt of aluminum pole base
3.	55.41'	PK nail W PwP#28-818 6"up
4.	38.05'	Due S to SE corner of 24-14-3 (Harrison)
5.	87.58'	Cut 'x' SE-bolt of aluminum pole base
6.	48.07'	PK nail NE PwP#12-817 4"up
7.	51.97'	Cut 'x' SW-bolt of aluminum pole base